
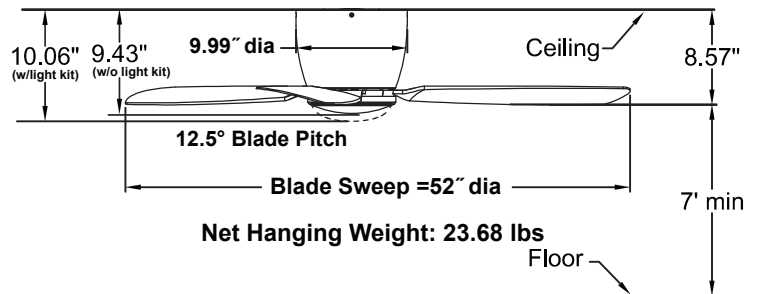


EMBRACE™

FPS7967
Ceiling Fan**

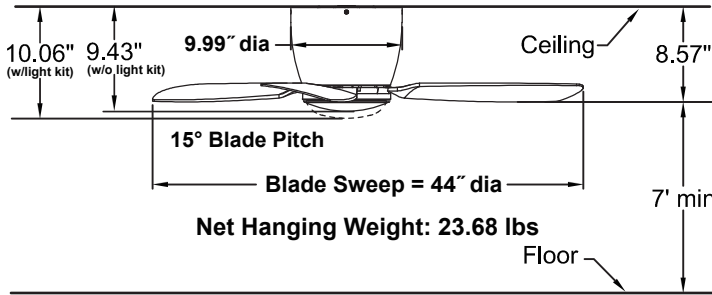

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

172 x 17 motor is designed for optimal performance with this fan.

BLADE SET:

A set of three 19" reversible composite blades is included for 44" fan.

A set of three 23" reversible composite blades is included for 52" fan.

CONTROL OPTIONS:

TR20WH hand-held remote control with wall mount is included. Optional C21 wall control is available. Push button remote control has 3 fan speeds, infinite light levels, reverse and off button. Instructions are provided with each control.

LIGHTING OPTIONS:

One bulb (100-watt halogen minican bulb -included) downlight fixture is included with this fan assembly. Maximum downlight wattage not to exceed 100 watts.

LOCATION USE:

Fan is rated for dry location only.

Available Finishes

OB	Oil-rubbed Bronze with Oil-rubbed Bronze blades and Opal Frosted Glass / Steel Cap
BN	Brushed Nickel with Brushed Nickel blades and Opal Frosted Glass / Steel Cap
MW	Matte White with Matte White blades and Opal Frosted Glass / Steel Cap

44" Fan Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	188	4238	88	0.41	48
Med	146	3207	100	0.42	32
Low	64	1316	146	0.26	9

52" Fan Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	160	5509	115	0.42	48
Med	126	3844	120	0.43	32
Low	58	2063	229	0.23	9