


BENITO™ v2

FP8003B**

52" Ceiling Fan

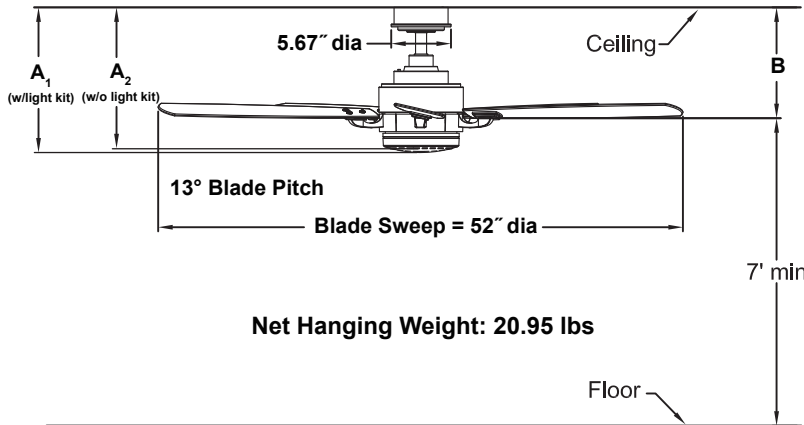

	A ₁	A ₂	B
Fan w/4.5" downrod	13.77"	13.67"	9.92"
Fan w/12" downrod	21.27"	21.17"	17.42"
Fan w/18" downrod	27.27"	27.17"	23.42"
Fan w/24" downrod	33.27"	33.17"	29.42"
Fan w/36" downrod	45.27"	45.17"	41.42"
Fan w/48" downrod	57.27"	57.17"	53.42"
Fan w/60" downrod	69.27"	69.17"	65.42"
Fan w/72" downrod	81.27"	81.17"	77.42"

Available Finishes	
BN	Brushed Nickel with Dark Walnut Blade and Opal Frosted Glass/Steel Cap
DZ	Dark Bronze with Dark Walnut Blade and Opal Frosted Glass/Steel Cap
GR	Matte Greige with Weathered Wood Blade and Opal Frosted Glass/Steel Cap
MW	Matte White with Matte White Blade and Opal Frosted Glass/Steel Cap
PN	Polished Nickel with Black Blade and Opal Frosted Glass/Steel Cap

INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

172 x 17 AC motor is designed for optimal performance with this fan.

BLADE SETS:

A set of five 21.5" composite blades is included.

CONTROL OPTIONS:

TR500 hand-held remote control is included. Push button remote control with variable fan speeds, infinite light levels and off button. Optional WC1WH, WC2WH, WR500WH, WR501WH and CWRL4 wall controls, BTCR9 and CRL4WH hand held remote controls and BTR9 and WFR50 receiver units are available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

One 18-watt LED included.

DOWNROD OPTIONS:

Fan comes with 1" dia. x 4.5" long downrod (DR1-4.5D). Optional downrods available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 19°. Most sloped ceiling installations require a downrod longer than the standard 12" downrod. Optional sloped ceiling kits (SCK1-52) are available for slope an angles up to 42°. Optional close-to-ceiling kit is available as well—sold separately. Call technical support for more information.

LOCATION USE:

Fan is rated for dry and damp locations.

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	175	5200	78	0.55	67
Med	120	3263	103	0.45	32
Low	63	1764	144	0.31	12

Energy Guide FTC			
Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
43	3590	12	83

Light Bulb Information (120V)					
Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
LED	18	1	1400	3000	90%