


BENITO™

FP8003** Ceiling Fan

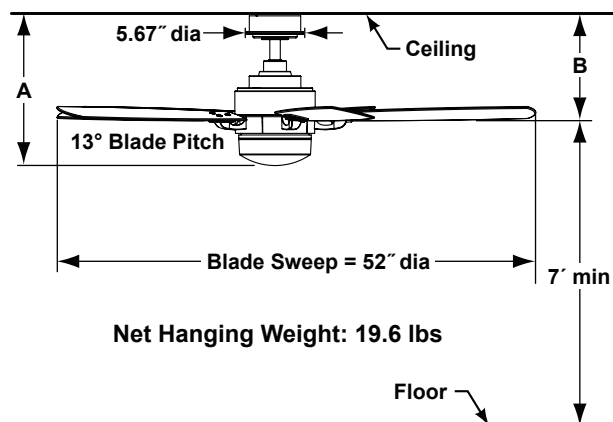

INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

172 x 20 motor is designed for optimal performance with this fan. 220 VAC, 50 Hz export version available.

BLADE SETS:

A set of five 21.5" reversible wood blades is included. Mahogany/Walnut included with Oil-Rubbed Bronze fan and Cherry/Walnut included with Polished Nickel and Satin Nickel fans.

CONTROL OPTIONS:

TR24WH hand-held remote control with wall mount is included. Push button remote control has 3 fan speeds, infinite light levels and off button. Optional CWRL4 wall control, CRL4WH and CRL8TS hand-held remote controls are available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

One bulb (100-watt halogen minican bulb -included) downlight fixture is included with this fan assembly. Maximum downlight wattage not to exceed 100 watts.

DOWNROD OPTIONS:

Fan comes with a 1" Dia. x 4.5" downrod. Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer downrod, a downrod coupler is available. The Benito™ fan can be mounted on a sloped ceiling up to 19°. Most sloped ceiling installations require a downrod longer than the standard 4.5" downrod. Optional close-to-ceiling kit is available as well—sold separately. Optional sloped ceiling kits (SCK1-52) are available for up to 52°. Call your local dealer for more information.

LOCATION USE:

Fan is rated for dry locations only.

	A	B
Fan w/4.5" downrod	16.50"	11.42"
Fan w/12" downrod	24.00"	18.92"
Fan w/18" downrod	30.00"	24.92"
Fan w/24" downrod	36.00"	30.92"
Fan w/36" downrod	48.00"	42.92"
Fan w/48" downrod	60.00"	54.92"
Fan w/60" downrod	72.00"	66.92"
Fan w/72" downrod	84.00"	78.92"

Available Finishes

OB	Oil-Rubbed Bronze with Opal Frosted Glass
PN	Polished Nickel with Opal Frosted Glass
SN	Satin Nickel with Opal Frosted Glass
BN	Brushed Nickel with Opal Frosted Glass
MW	Matte White with Opal Frosted Glass

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	157	4774	80	0.50	60
Med	95	2775	111	0.39	25
Low	60	1587	139	0.29	11