

# INSTALLATION INSTRUCTIONS

For Models # P801-077 (Revised Date: APR 11, 2012)

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

## MOUNTING THE FIXTURE (Fig. 1)

1. Shut off power at the circuit breaker and remove the old fixture including the mounting hardware.
2. Carefully remove the fixture from the carton and check that all parts are included as shown in (Fig 1).
3. Remove screws (G)(Size:0.16\*0.55" )from canopy (F). Secure mounting bracket (B) to the junction box using mounting screws (C) (Size:0.16\*0.63" ). The side of the mounting bracket labeled "GND" must face out.

## SUGGESTED INSTALLATION (Fig. 1)

4. Determine the desired hanging height and thread rods (D) to socket (H). Use nipple(s) (K) to connect multiple rods. Pass the wire carefully through each rod (D) as you assemble.
5. Thread the hanger ball (A) to rods (D).
6. While holding the fixture, install the fixture into the mounting bracket (B) by tilting at a slight angle so that the hanger ball (A) slips into the mounting bracket (B). Align the notch in the hanger ball (A) to the tab on the mounting bracket (B) to prevent the fixture from turning.

## CONNECTING THE WIRES (Fig. 2)

7. Connect the electrical wires as shown in Fig. 2, making sure that all wire connectors (E) are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate using the green screw provided.

## FINISHING THE INSTALLATION (Fig. 1)

8. Place the canopy (F) over the rods (D) and allow it to rest on the socket.
9. Place canopy (F) onto mounting bracket (B) and secure using screws (G).
10. Install the light bulb(I) in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING). (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
11. Place the glass shade (J) on the lamp holder (H). Use the aluminum cube (L) to fix the glass shade to the lamp body by turning clockwise.

Your installation is now complete. Return power to the junction box and test the fixture.

**IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.**

Fig. 1

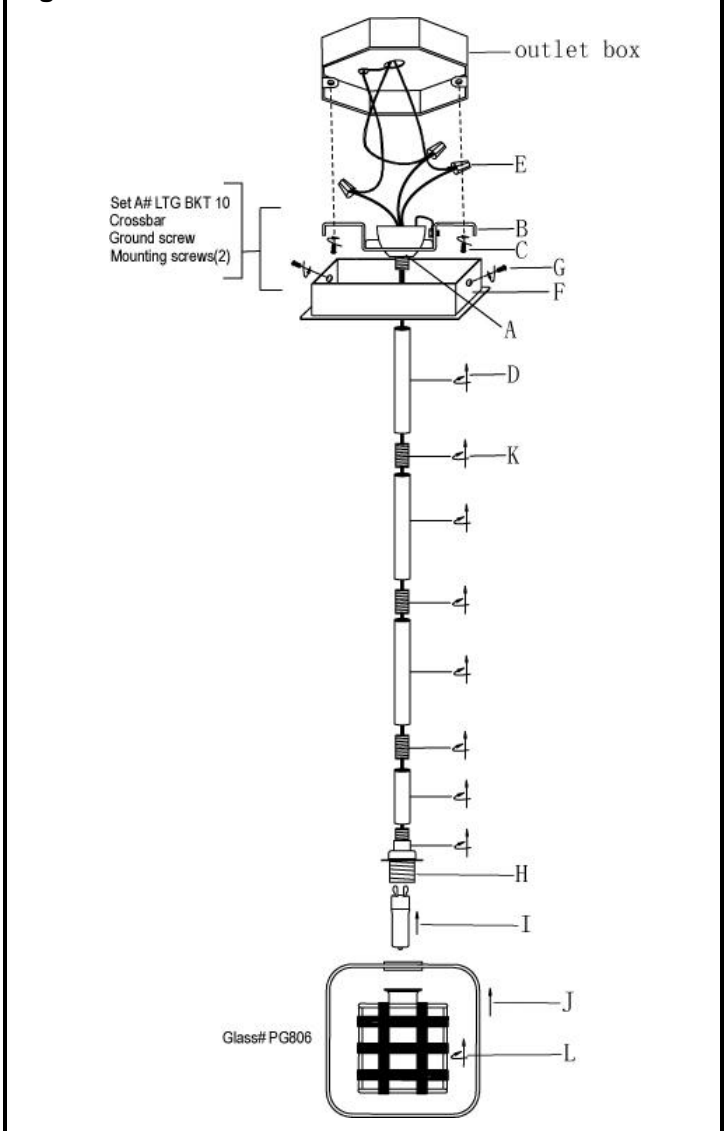


Fig. 2

