





Job Name:

Job Type:

Comments:

Quantity:

11019: New Construction Shallow IC Airtight Housing Specification Images:

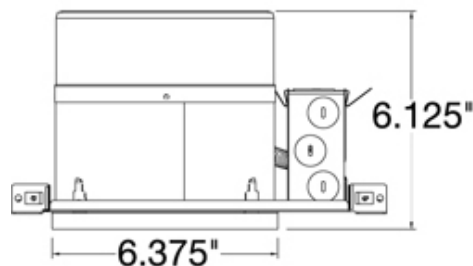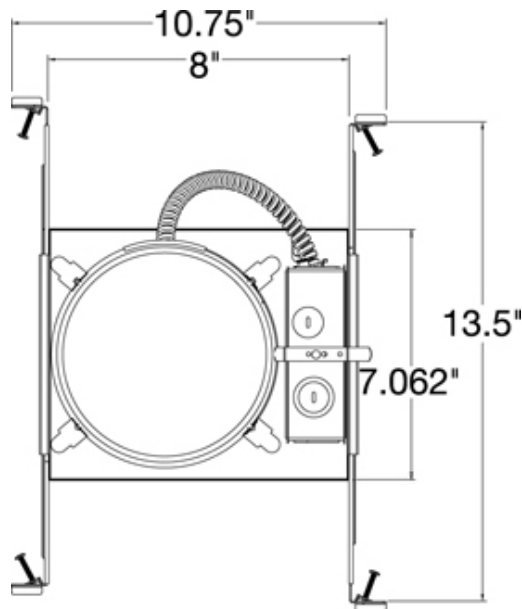

New Construction Shallow IC Airtight Housing

Trims: 11037AT, 11020AT, 11033AT, 11034AT, 11035AT, 1136AT, 11055AT, 1158AT, 1159AT

Airtight Construction: Meets airtight requirements for 2.0 CFM or less air leakage.

Safe- Thermally Protected/Listed for Damp Location: IC housing is approved for use in direct contact with insulation.

Housing Adjustment: Housing adjusts vertically for various ceiling thicknesses.

Joist Tab: Tab to locate on bottom of joist.

Notch for T-Bar Ceilings: No clips required. Secure bar hanger to T-Bars with wires or screws.

Snap-In Socket: Snap in socket locates lamp in optimum position.

Sealed Trim: One piece sealed trims. No light leaks.

Bar Hanger: Break-away bar hangers easily extend and will not fall out of plaster flange, providing sturdy installation.

Bar Hanger Locking Screw: Tighten screw to lock bar hangers in place.

Quick Hit: Integral captive nails included and positioned for fast, easy installation.

Hinged Door: The hinged junction box door allows full access for wiring while remaining attached to the recess housing.

Junction Box with Integral Romex Connector: Junction box with integral romex connector, quick-push and lock connector and through circuit wiring with 4 in, 4 out #12 wire, saves installation time.

UPC #:785652110191

Dimensions:

Diameter:	6 3/8"
Length:	13 1/2"
Width:	10 3/4"
Height:	6 1/8"

Material List:

1 Housing - Steel - Raw Steel

Safety Listing:

UL Listed for Damp Locations / IC
cUL Listed for Damp Locations / IC

Shipping Information:

Package Type	Product #	Quantity	UPC	Length	Width	Height	Cube	Weight	UPS Ship
Individual	11019	1	785652110191	14	11	7	0.624	2.4	Yes
Master Pack		6	10785652110198	25	20	7.25	2.098	18.1	Yes
NJ Pallet		216		48	40	72.25	80.278	651.6	No
NV Pallet		216		48	40	72.25	80.278	651.6	No

Trim

11020AT-15
6" Open Trim
White Steel Trim
Maximum Wattage:
75w Par30L
65w BR-30

11037AT-15
6" Regressed Eyeball Trim
White
White Steel Trim
Maximum Wattage:
75w Par30L
65w BR-30

1158AT-15
6" Deep Cone Baffle Trim
Black Aluminum Baffle
White Aluminum Trim
Maximum Wattage:
50w Par30S
75w Par30L
65w BR-30

11033AT-15
6" Flat Glass Shower Trim
Satin White Glass Diffuser
White Aluminum Reflector
White Aluminum Trim
Maximum Wattage:
40w A-19
Suitable For Shower Light

11055AT-15
6" Fresnal Glass Shower T
Clear Glass Lens
White Aluminum Reflector
White Aluminum Trim
Maximum Wattage:
40w A-19
Suitable For Shower Light

1159AT-14
6" Shower Trim
White Trim / Baffle Aluminum Baffle
White Trim / Baffle Aluminum Trim
Maximum Wattage:
50w Par30S
75w Par30L
Suitable For Shower Light

11034AT-15
6" Drop Lens Shower Trim
Satin White Glass Diffuser
White Aluminum Reflector
White Aluminum Trim
Maximum Wattage:
40w A-19
Suitable For Shower Light

1136AT-15
6" Eyeball Trim
White
White Steel Trim
Maximum Wattage:
75w Par30L
65w BR-30

11035AT-15
6" Flat Glass Trim
Satin White Glass Diffuser
White Aluminum Reflector
White Steel Trim
Maximum Wattage:
40w A-19

1158AT-14
6" Deep Cone Baffle Trim
White Trim / Baffle Aluminum Trim
Maximum Wattage:
50w Par30S
75w Par30L
65w BR-30